

CPRO TUBE

Product Information

November 28, 2017

PROCHAFE

STRONGEST THERE IS



CPRO MOORING TUBE has most of the features of the **CPRO MOORING H&L**, but since it is tubular, it is generally installed to the product before it is factory spliced or spliced on-site.


The customer can install it on-site without re-splicing the rope. If this is the case the **CPRO MOORING TUBE** must be large enough to be pulled over the eye and the splicing area. Manufactured in any length.

- Great weight to durability ratio.
- Great abrasion and cut resistance.
- Easy to install and remove for replacement or rope inspection.
- Will not absorb water.

ProChafe AS

www.prochafe.com

Håhjem Næringspark
6260, Skodje
Norway

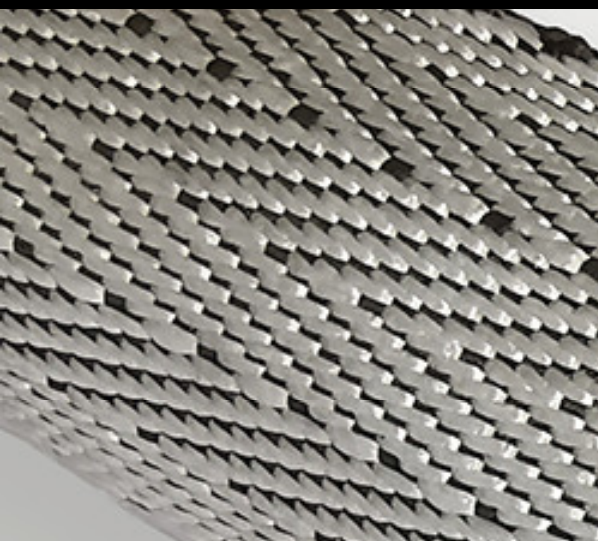

Construction:

Herringbone / solid plain weaved canvas

Fiber:

UHMWPE / Aramid / Polyester

Specific gravity:

0.98 – 1.44

Coating:

Optional

Water absorption:

0.25 % – 0.4 %

Melting point:

+ 165 °C – 425 °C

Abrasion resistance:

Excellent

Cut resistance:

Excellent

Diameter:

24 – 150 mm

* The range specified under specific gravity, water absorption and melting point covers the range of all materials stated under fiber. Other materials such as nylon, PTFE, etc. are also available upon request.

Sewing thread used is made with Endumax® (weight-for-weight, 11 times stronger than steel). Hook and loop is proven to work in the maritime environment. All products can be supplied with fastening bands.



Fun fact: This is not a QR-code. This is a weaving pattern used in fabricating synthetic materials and it is called the Herringbone Weave and dates back to ancient Egypt.

Disclaimer

ProChafe AS endeavours to ensure that all products are manufactured to the highest standard, these guidelines are not intended and do not create any warranties, express or implied. ProChafe AS expressly disclaims warranties or representations of any kind, express or implied, including the implied warranties of merchantability and fitness for a particular purpose. ProChafe AS shall not be liable for any consequential, incidental or contingent damages whatsoever stemming from the use of these guidelines. ProChafe AS has a policy of continual improvement which may result in specification and colour changes without prior notice.